



CB-0422A

CB-0418A

CB-0416A

CB-0414A

CB-0418AP

CB-0422AP




LINK BAS (Building Automation System)

Twisted Pair Shield Cable, 2 pairs

Scope of Applications

LINK BAS, twisted pairs cable describes two pairs (4 Cores). The maximum operating voltage is 300VAC/VDC, the flame retardant is in accordance with UL444.

Drawing

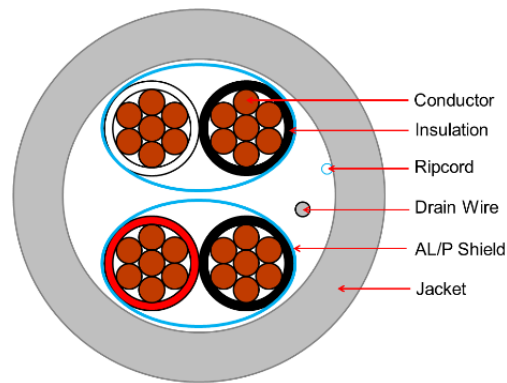

Technical Standards

- UL2464, Multiple-conductor cable using non-integral jacket
- UL444
- RoHS Compliant

Applications Support

- Remote control of automatic electrical equipment conditioning
- Industrial Machine Control
- Control Circuits, Security System, Process Control
- Building Automation System (BAS), Access Control
- RS-485, RS-232, SCADA, DCS and TCP/IP
- Internal wiring or external interconnection of electronic equipment
- Surveillance



Cable Construction

Conductor	Material	Stranded Tinned Copper wire
Insulation	Material	HDPE, Black, Red and White Color
Drain Wire	Material	Stranded Tinned Copper, 7x0.20 mm (no. of wire x diameter)
Shielded	Material	Aluminum Polyester Tape, individually pair shielded
Ripcord		Yes
Jacket (indoor)	Material	Lead Free, FR-PVC, Gray (RAL 7001)
	Flame Rating	CM
Jacket (Outdoor)	Material	UV-Proof PE, Black

TECHNICAL SPECIFICATION

Part Number	No. of Pairs	AWG	Insulation		Jacket	
			Thickness (mm)	Diameter (mm)	Thickness (mm)	Diameter (mm)
CB-0422A	2	22	0.25 ±0.05	1.30 ±0.05	0.60 ±0.05	4.8 ±0.3
CB-0418A	2	18	0.40 ±0.05	2.00 ±0.05	0.80 ±0.05	7.0 ±0.3
CB-0416A	2	16	0.40 ±0.05	2.30 ±0.05	0.80 ±0.05	7.8 ±0.3
CB-0414A	2	14	0.60 ±0.05	3.00 ±0.05	0.90 ±0.05	9.8 ±0.3
CB-0418AP	2	18	0.40 ±0.05	2.00 ±0.05	0.80 ±0.05	7.0 ±0.3
CB-0422AP	2	22	0.25 ±0.05	1.30 ±0.05	0.60 ±0.05	4.8 ±0.3

ELECTRICAL CHARACTERISTIC

Part Number	No. of Pairs	DCR Conductor (Ohm/km)	DCR Shielded (Ohm/km)	Capacitance Cond. to Cond. (pF/m)	Capacitance Cond. to Shield (pF/m)	Voltage (VAC/VDC)
CB-0422A	2	≤ 52.0	54.0	100	185	300
CB-0418A	2	≤ 22.0	46.0	130	237	300
CB-0416A	2	≤ 13.7	16.9	63	121	300
CB-0414A	2	≤ 9.5	18.0	78	154	300
CB-0418AP	2	≤ 22.0	46.0	130	237	300
CB-0422AP	2	≤ 52.0	54.0	100	185	300

Physical Properties

Tensile Strength	≥ 13.8 Mpa
Max. Recommended Pulling Tension	460N
Aged Tensile Strength	≥ 85%
Unaged Elongation	≥ 100%
Aged Elongation	≥ 50%
Cold Bend (-20°C x 4 hours)	No Crack
Operating Temperature Range	-10°C to 60°C
Min. Bend Radius (Install)	8 x OD



Order Information

Part number	Description	Color	Length	Package
CB-0422A	LINK BAS Twisted Pair Shield 4x22 AWG, 2 Pair	Gray	500 m	Roll
CB-0418A	LINK BAS Twisted Pair Shield 4x18 AWG, 2 Pair	Gray	500 m	Roll
CB-0416A	LINK BAS Twisted Pair Shield 4x16 AWG, 2 Pair	Gray	500 m	Roll
CB-0414A	LINK BAS Twisted Pair Shield 4x14 AWG, 2 Pair	Gray	500 m	Roll
CB-0418AP	LINK BAS Twisted Pair Shield 4x18 AWG, 2 Pair, Outdoor	Black	500 m	Roll
CB-0422AP	LINK BAS Twisted Pair Shield 4x22 AWG, 2 Pair, Outdoor	Black	500 m	Roll